JASCO®

myTouchSmart Simple Set In-Wall Timer
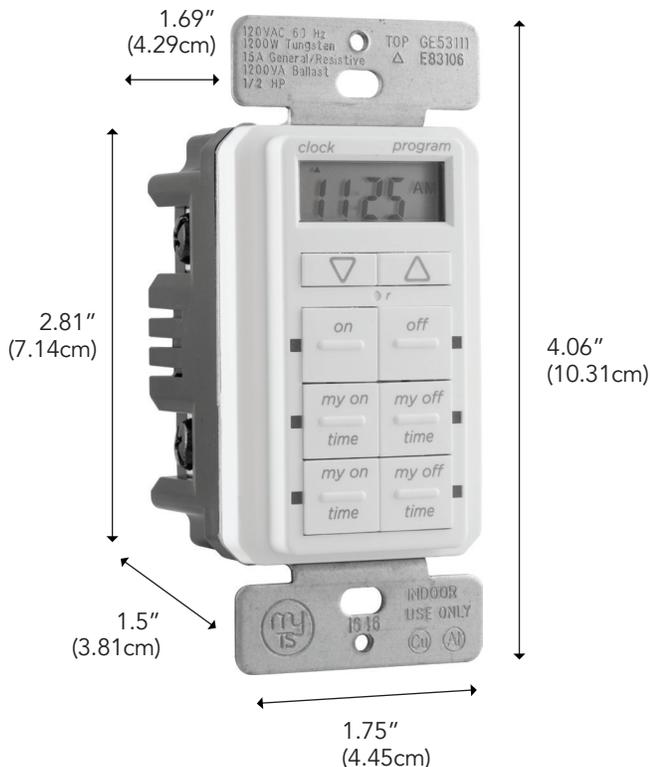
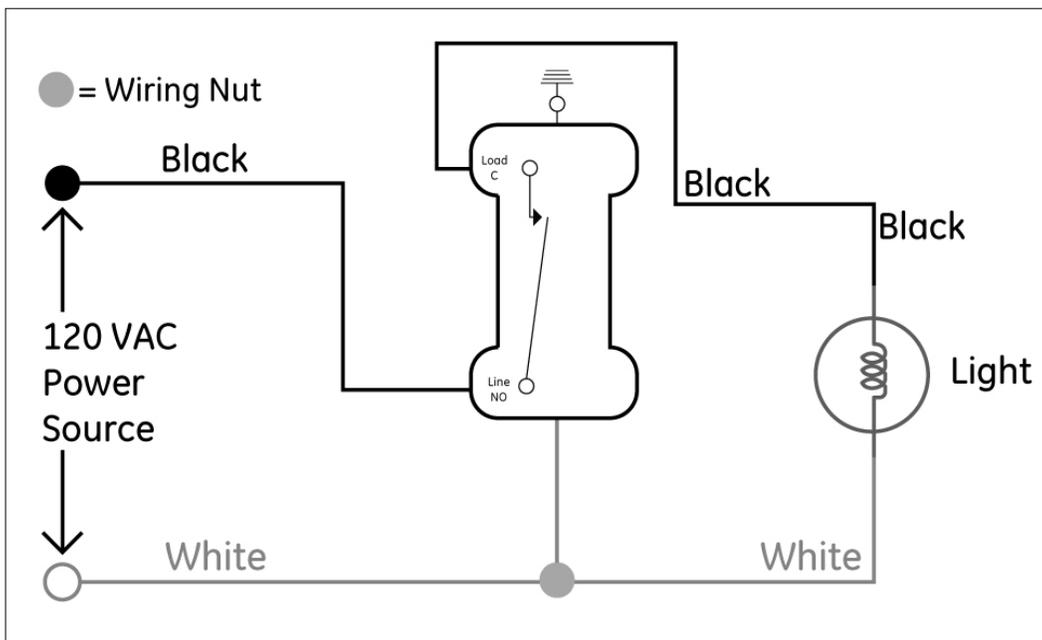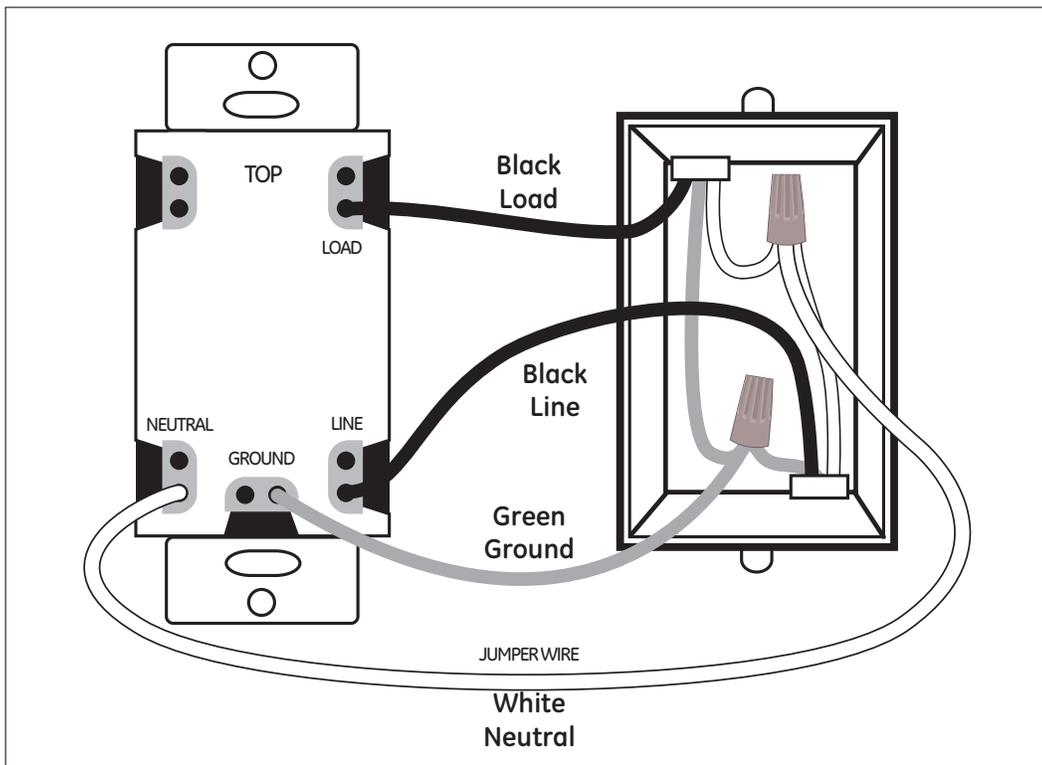myTOUCH ▼SMART▲ ™

Specifications

Power: 120VAC, 60Hz **Signal Frequency:** 60Hz
Maximum Load: 1200W tungsten, Ballast 1200VA, 1/2HP motor, 1800W (15A) resistive
Maximum Traveller Length: 200 ft.
Operating Temperature: 32-104 °F (0-40 °C)
Operating Humidity: 5-85%
Minimum Hole for Wire: #12 AWG (0.081 dia) and #14 AWG wire
Warranty: 1-year limited product warranty

Requires neutral wire. Switch must be mounted indoors.

Design Features

· Simple myTouchSmart Programming

· 24 Hour Programmable Daily Cycle

· 2 Custom ON/OFF Settings

· Large, easy to read program buttons

· Single Pole

· Easy Installation - Screw terminals, no flying leads

· Rechargable NiMH battery automatically saves settings and is a back up battery for up to 30 days
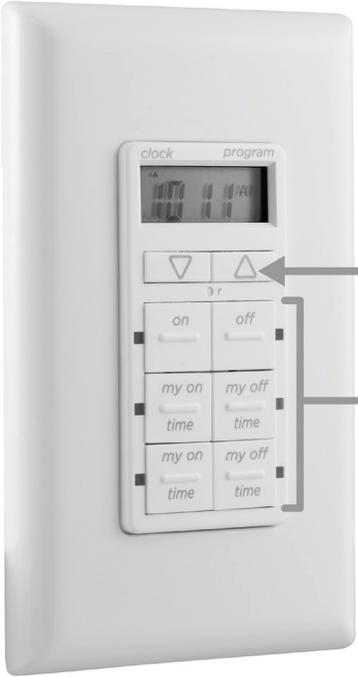
· Works with LED, CFL, Incandescent & Halogen

1.69"
(4.29cm)

2.81"
(7.14cm)

4.06"
(10.31cm)

1.5"
(3.81cm)

1.75"
(4.45cm)

Single-pole Installation

TOP

LOAD

Black
Load

Black
Line

NEUTRAL

LINE

GROUND

Green
Ground

JUMPER WIRE

White
Neutral

● = Wiring Nut

Black

120 VAC
Power
Source

Load
C

Black

Black

Line
NO

Light

White

White

Additional Installation Information

· Indoor use only

· Wallplates sold separately

· Trilingual instruction manual – English, French, Spanish

· Visit myTouchSmart.com for more information

Device Configuration

SIMPLE
SETUP

1 Just scroll to set the current time.

2 Simply set custom ON/OFF times that suit your schedule!

Certifications & Compliances

Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

Related Products - myTouchSmart In-Wall Wi-fi Timers

41149
In-Wall Wi-fi
Smart Dimmer

41150
Plug-in Wi-fi
Smart Outlet

41147
In-Wall Wi-fi
Smart Switch

In-Wall SunSmart™ Timer

33861
In-Wall Sunsmart™
All-in-One Timer

For additional **myTouchSmart** products visit **myTouchSmart.com**